

Features


- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- Single handle operation cartridge with ceramic disc
- Flexible braided hoses for ease of installation
- 1.2gpm (4.5 L/min) max flow rate

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC & DOE
- EPA WaterSense
- Commonwealth of MA
- ADA compliant

5601-1
5601-1-WP

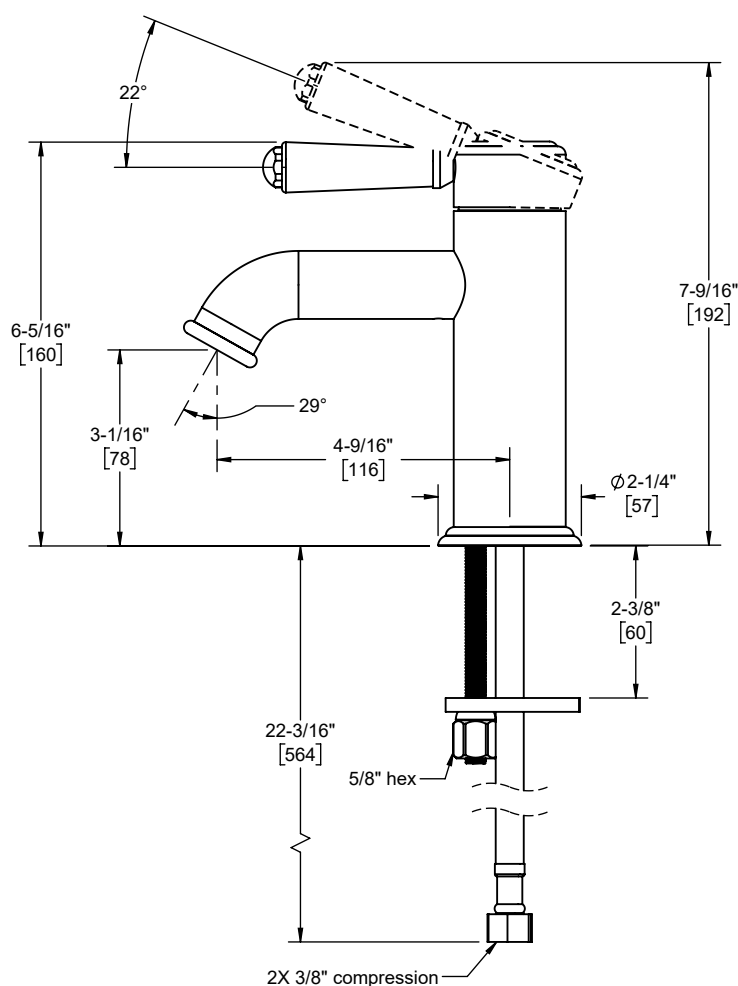

Through-Hole Specifications

	Min	Recommended	Max
Spout:	Ø 1-1/4" [32]	Ø 1-3/8" [35]	Ø 1-5/8" [41]