

Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- 1/4" compression inlet
- Max flow rate: 1.8 gpm (6.8 L/min)
- Ceramic disc cartridge
- Compatible with RO filter units

Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant




9620Q-K10-35 shown

9620Q-K10-33
9620Q-K10-35
9620Q-K10-48
9620Q-K10-61



XX = Denotes handle style

Handle Style	A	B
33	4-3/8" [111]	2-1/2" [64]
35	4-3/8" [111]	2-1/2" [64]
48	4-3/8" [111]	2-1/2" [64]
61	4-3/8" [111]	2-1/2" [64]

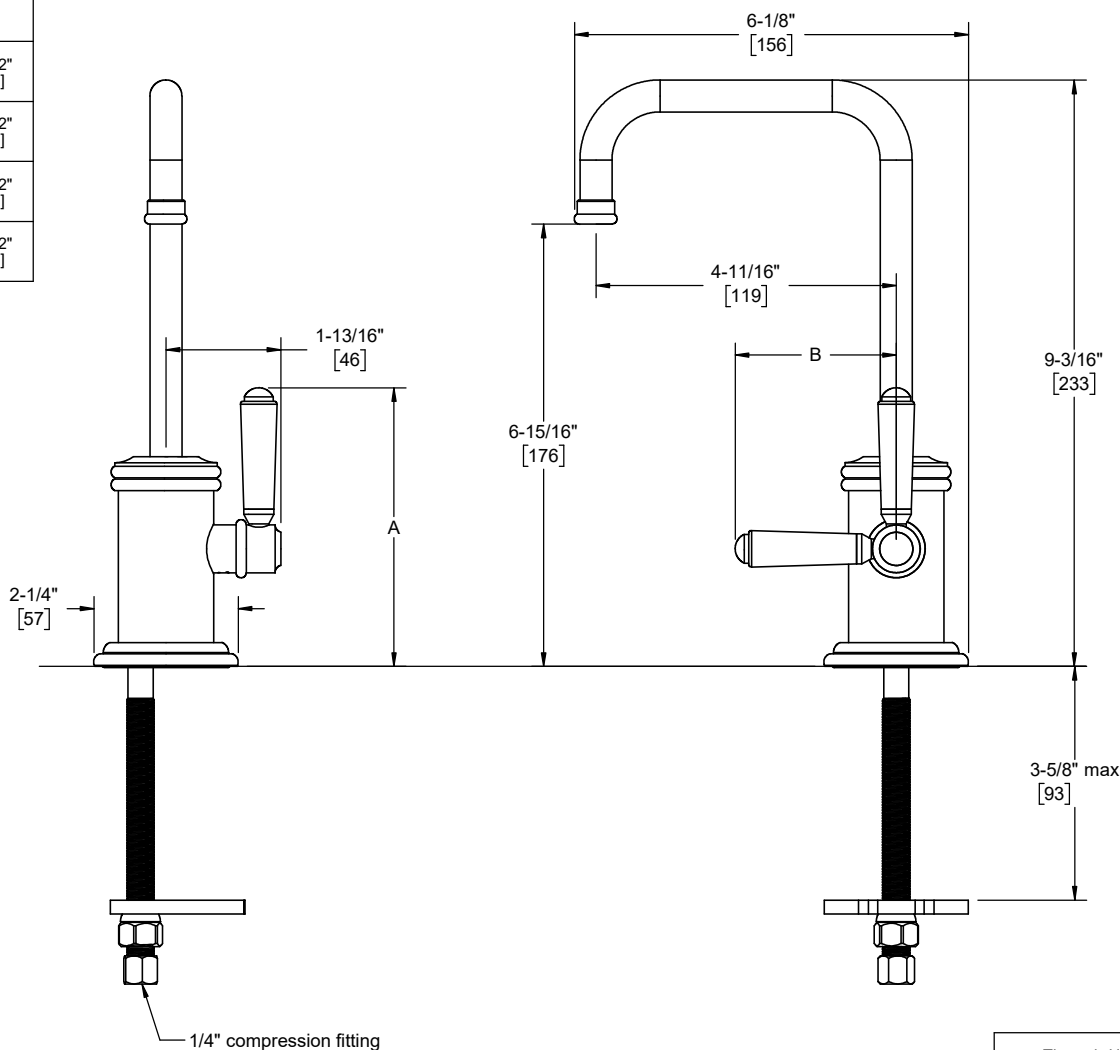

Through-Hole Specifications		
Min	Recommended	Max
Ø 1/2" [13]	Ø 1" [25]	Ø 1-1/2" [38]