

Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- Insulated spout to reduce heat to faucet
- Self-Closing for hot water
- Max flow rate: 1.0 gpm (3.8 L/min)
- Compatible with RO filter units (may require 9602)
- Requires Hot Water Tank (9628SS) sold separately

Codes/Standards Applicable



Product meets or exceeds the following:

- *ASME A112.18.1/CSA B125.1*
- *NSF 61, NSF 372, CEC, & DOE*
- *Commonwealth of MA*
- *ADA compliant*



9623Q-K81-BL shown

9623-K81-BL shown

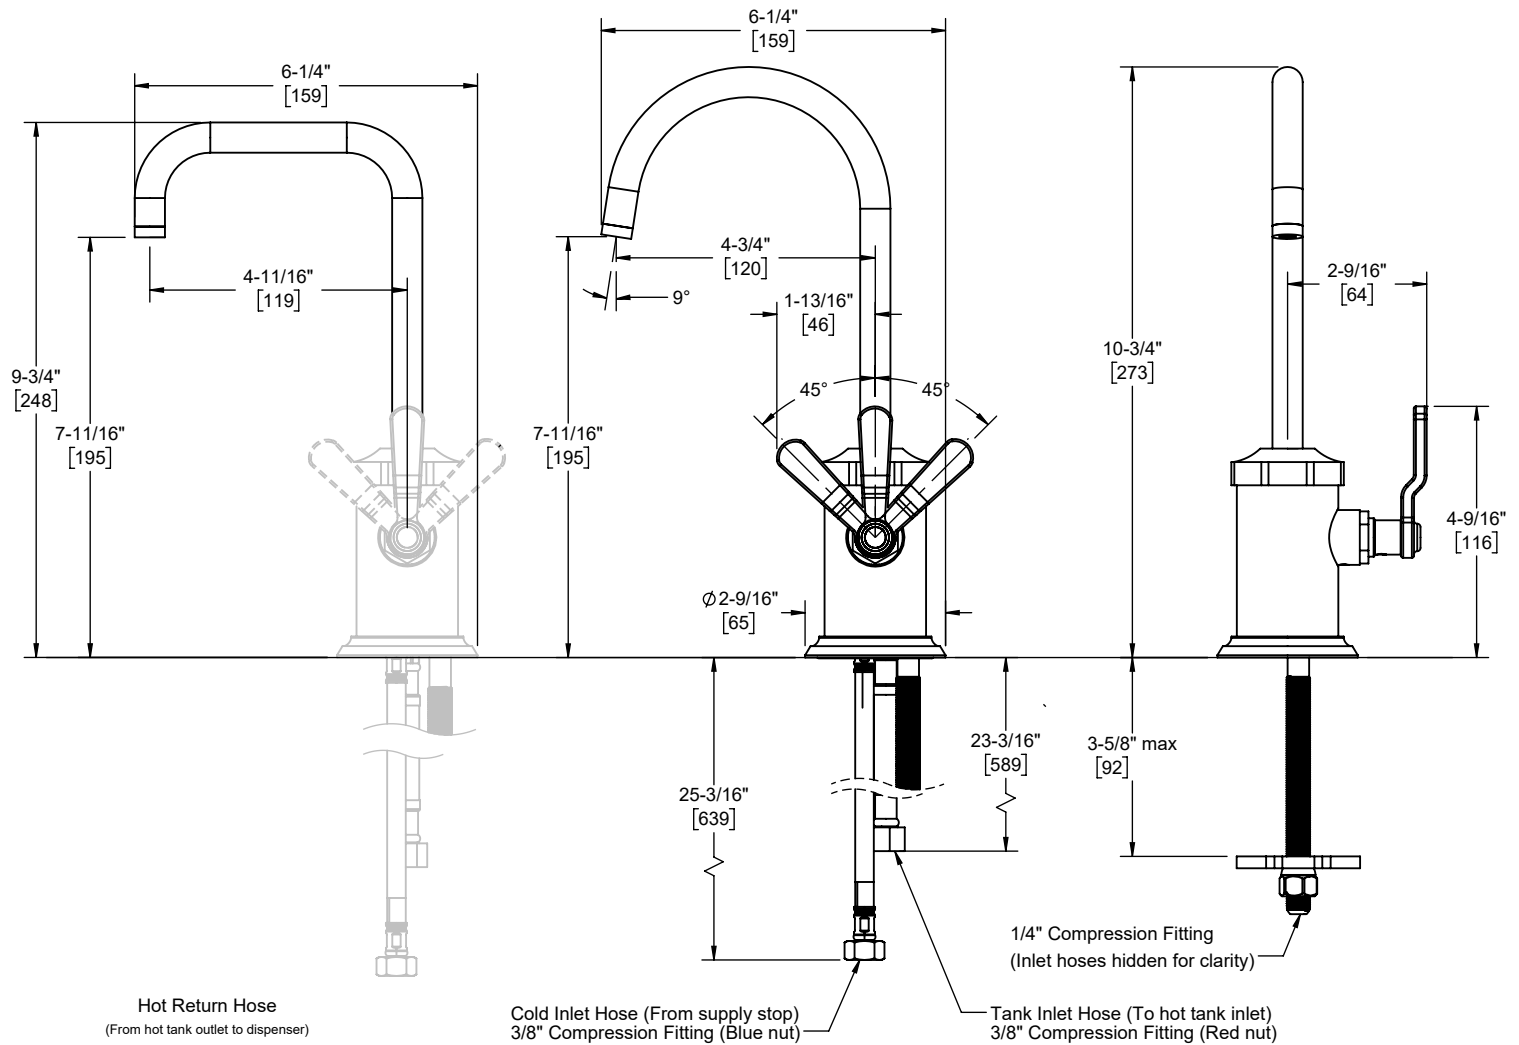

-  Couplings are to be used on hot tank
1 @ 1/4" Tank outlet to hot return hose
-  1 @ 3/8" Tank inlet to tank inlet hose



Supply line flow restrictor
for 3/8" compression fitting
9/16"-24 male x female

<u>Through-hole Specifications</u>		
<u>Min</u>	<u>Recommended</u>	<u>Max</u>
Ø 1-9/16" [40]	Ø 1-5/8" [41]	Ø 1-13/16" [46]

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]