

Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Self-Closing for hot water
- Max flow rate: 1.0 gpm (3.8 L/min)
- Compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

Codes/Standards Applicable

Product meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant



9623-K81-BL



<u>Through-hole Specifications</u>		
<u>Min</u>	<u>Recommended</u>	<u>Max</u>
Ø 1-9/16" [40]	Ø 1-5/8" [41]	Ø 1-13/16" [46]

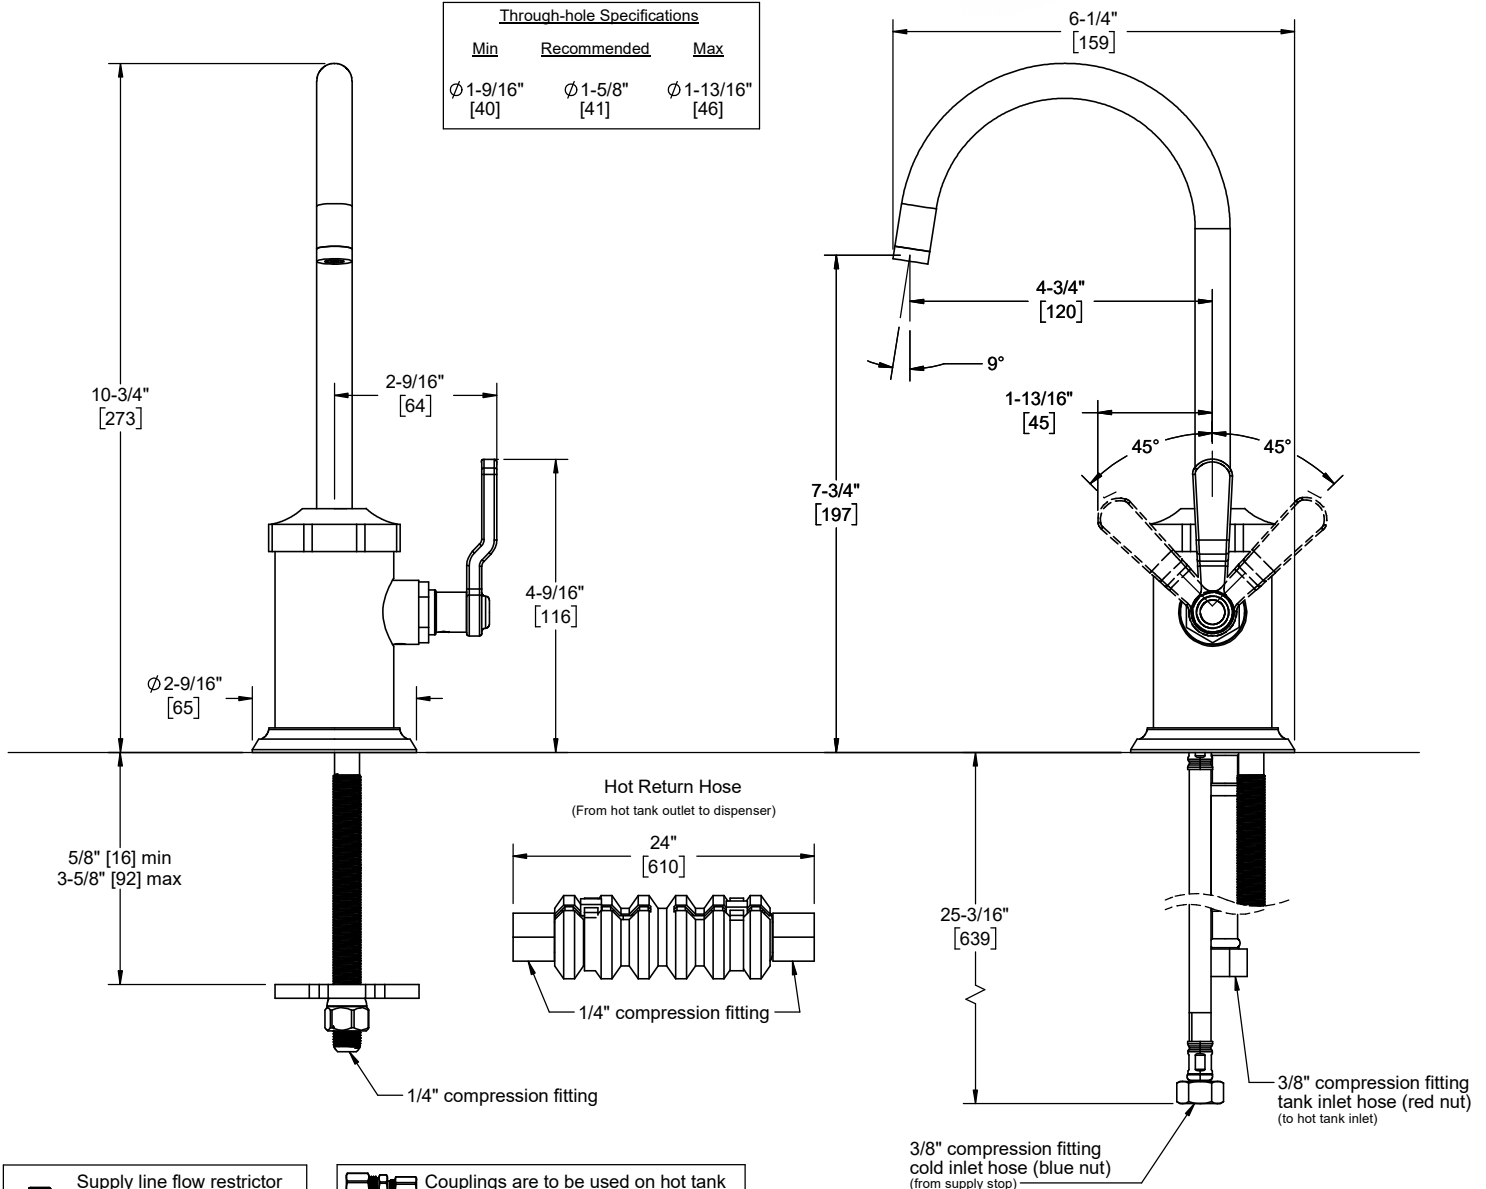

Supply line flow restrictor
for 3/8" compression fitting
9/16"-24 male x female



Couplings are to be used on hot tank
1@ 1/4" tank outlet to hot return hose
1@ 3/8" tank inlet to tank inlet hose

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]