



California Faucets®

Stainless Steel Combo Hot & Cold Water Dispenser

COTO™

Features

- 7 artisan finishes including 4 PVD finishes
- 316 stainless steel construction
- Excellent corrosion resistance, for indoor or outdoor use
- Insulated spout to reduce heat to faucet
- Self-Closing for hot water
- Max flow rate: 1.0 gpm (3.8 L/min)
- Compatible with RO filter units (may require 9602)
- Requires Hot Water Tank (9628SS) sold separately



Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant



9623-K90-BQ-SSS shown

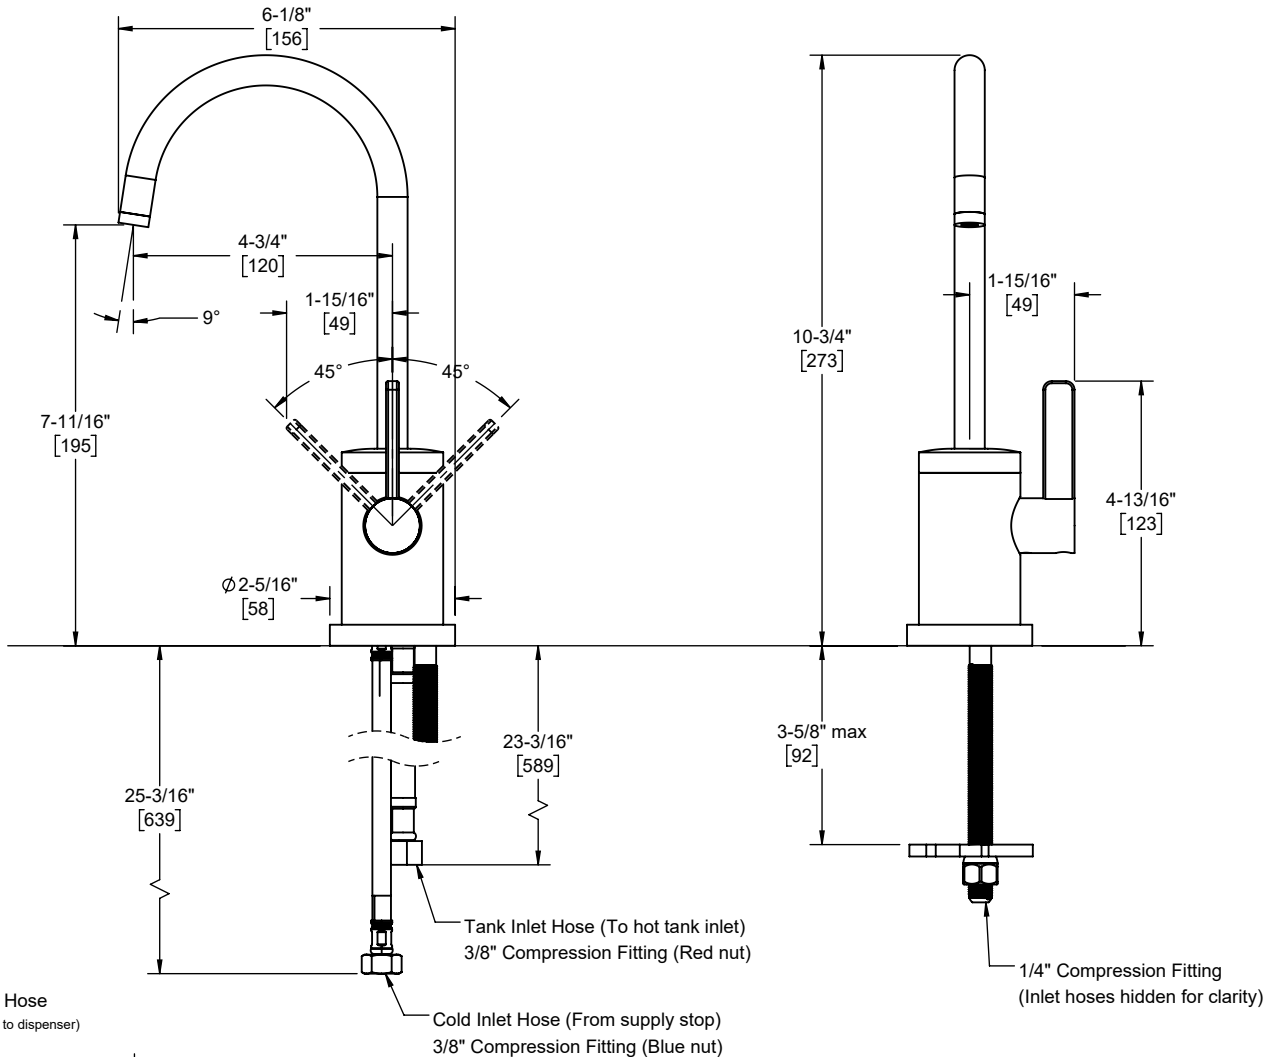

Specifications subject to change without notice

- Couplings are to be used on hot tank
- 1 @ 1/4" Tank outlet to hot return hose
 - 1 @ 3/8" Tank inlet to tank inlet hose



Supply line flow restrictor
for 3/8" compression fitting
9/16"-24 male x female

Through-Hole Specifications

Min	Recommended	Max
Ø 1-3/8" [35]	Ø 1-3/8" [35]	Ø 1-5/8" [41]

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]