

## Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- Insulated to reduce heat to faucet
- Max flow rate: 1.0 gpm (3.8 L/min)
- Self-Closing handle
- Compatible with RO filter units
- Requires Hot Water Tank (9628SS) sold separately

## Codes/Standards Applicable

Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant




9625-K50-ST-SN shown

**9625-K50-XX**



XX = Denotes handle style

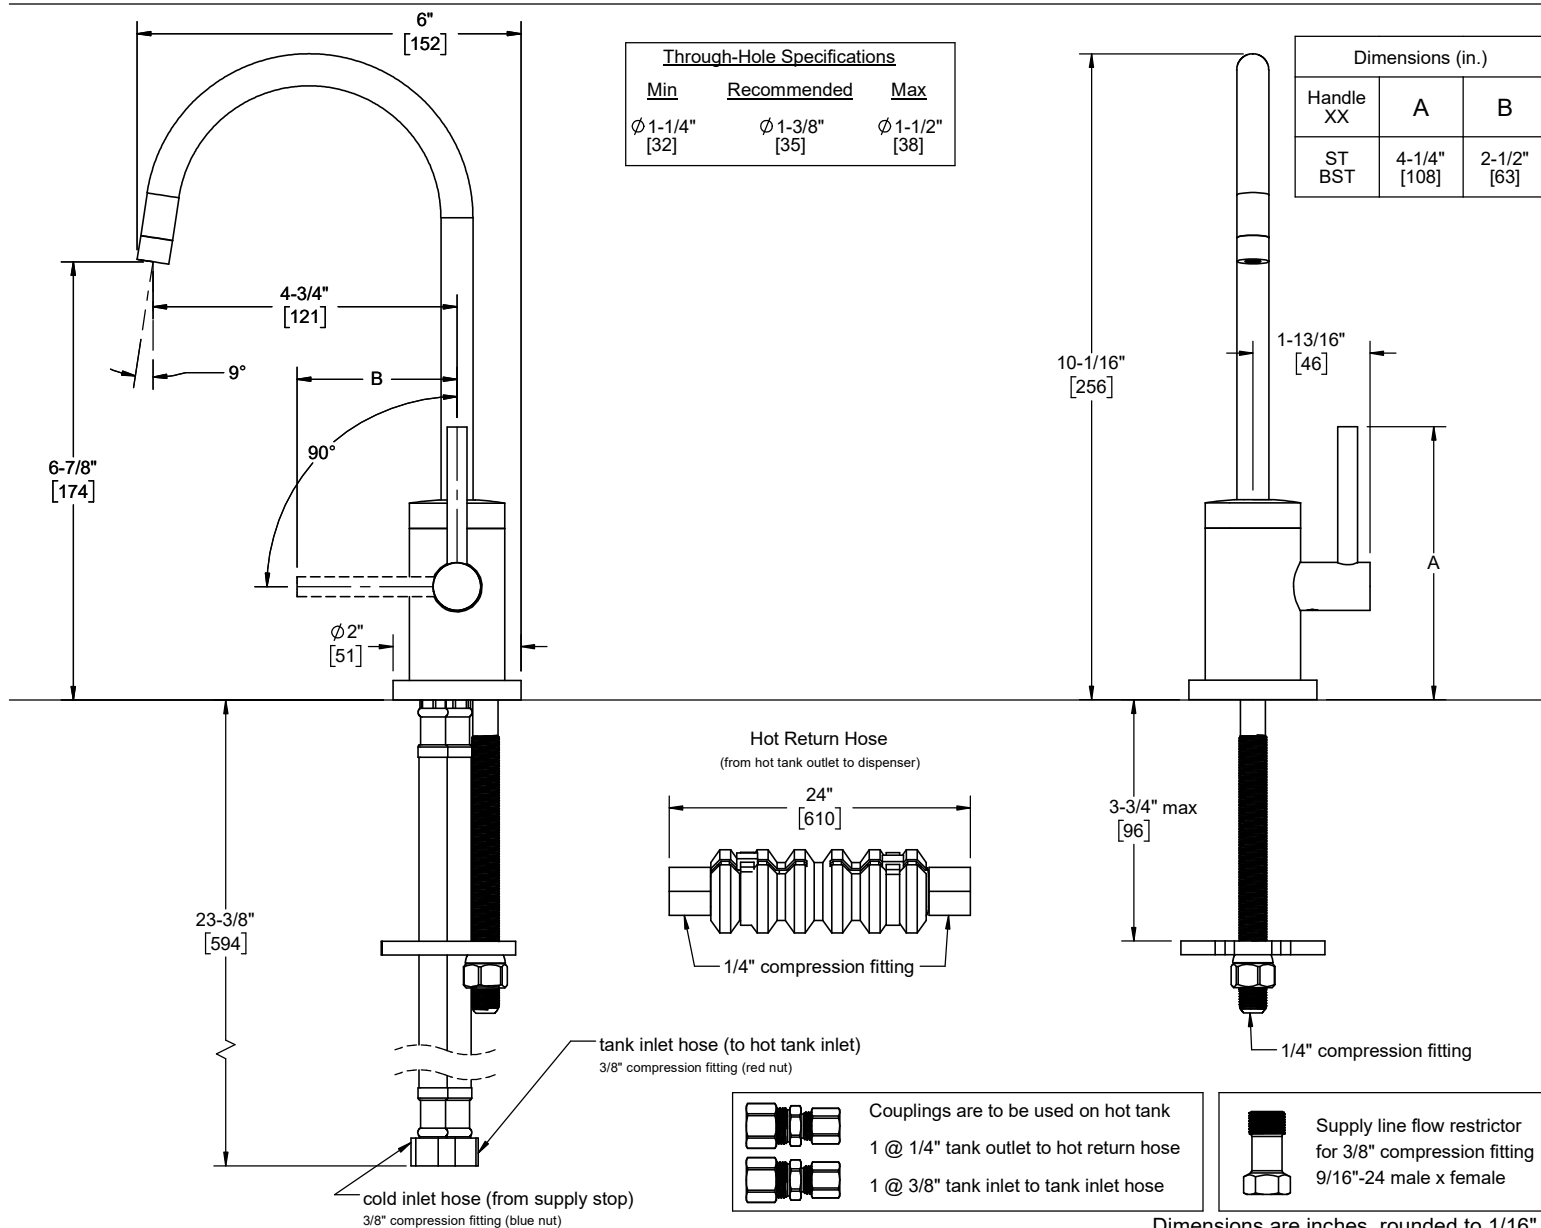

Specifications subject to change without notice