



California Faucets®

La Spezia™

Hot Only Water Dispenser

Features

- 25+ artisan finishes including 10+ PVD finishes
- All brass construction
- Insulated spout to reduce heat
- Max flow rate: 1.0 gpm (3.8 L/min)
- Compatible with RO filter units (may require 9602)
- Requires Hot Water Tank (9628SS) sold separately

9625-K55-TG
9625Q-K55-TG

Codes/Standards Applicable

Product meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- NSF 61, NSF 372, CEC, & DOE
- Commonwealth of MA
- ADA compliant



9625Q-K55-TG shown



9625-K55 shown

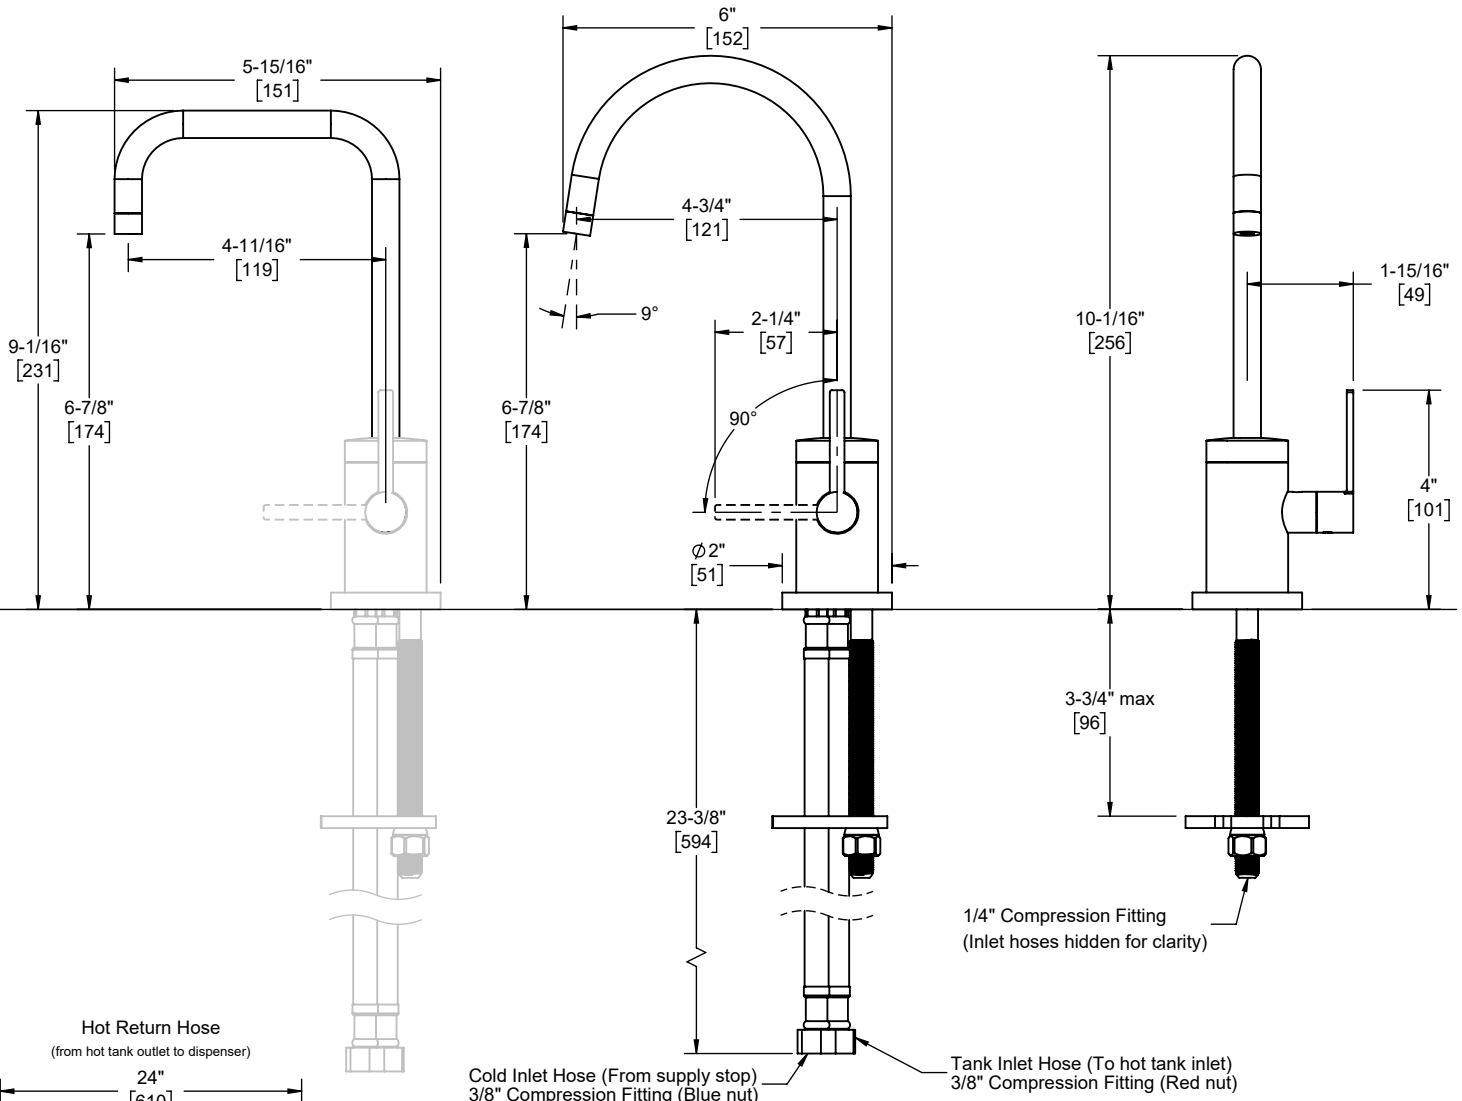

	Couplings are to be used on hot tank
	1 @ 1/4" Tank outlet to hot return hose
	1 @ 3/8" Tank inlet to tank inlet hose

	Supply line flow restrictor for 3/8" compression fitting 9/16"-24 male x female
--	---

Through-Hole Specifications		
Min	Recommended	Max
Ø 1-1/4" [32]	Ø 1-3/8" [35]	Ø 1-1/2" [38]

Specifications subject to change without notice

Dimensions are inches, rounded to 1/16"
[Dimensions in brackets are mm, rounded to 1mm]